



HTKC15

Series model

Actuator





Product Categories

1. Industrial Applications
2. Furniture Applications
4. Medical applications

GeMinG HTKC15 linear actuator,
Aluminium-Alloy outer tube and inner tube, beautiful and corrosion resistant
The average noise level is lower than 60dB(ambient noise is less than 60dB)
Built-in electronic limit switches
High-strength front and back fixtures

Product Specifications


Voltage:	12V DC
Motor type:	Brush DC motor
Duty cycle:	10% (2min on, 18min off)
Stroke:	10mm~300mm
Maximum push (pull):	20N
Speed:	15mm / s
Minimum dimensions:	Stroke + 83mm Stroke + 98mm(50<S <300 MM)
Color:	Black
Operating temperature range:	+ 5 ° C ~ + 40 ° C
Protection rating:	IP54/IP66
Certification:	CE



Series model

HTKC15

Performance

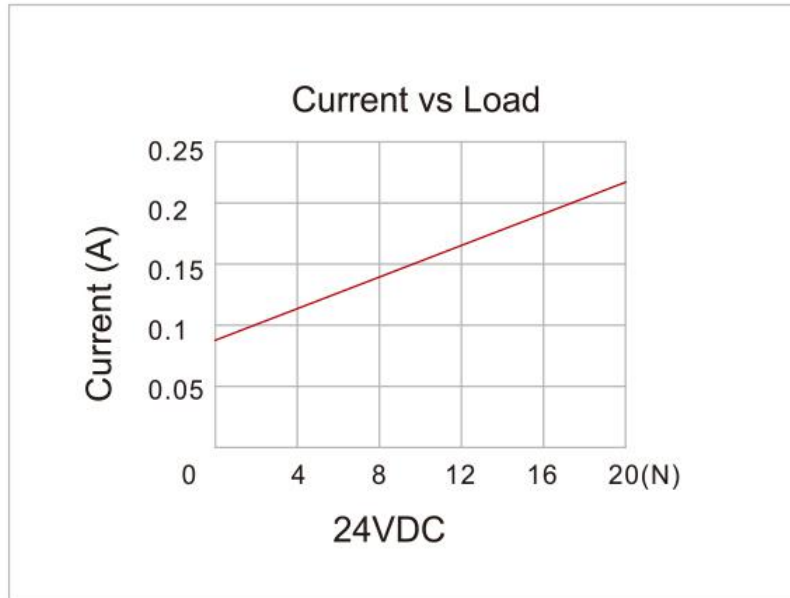



Drawings
Standard size
(mm)

Series model

HTKC15

